


MT-LVL E12 FOR WALL FRAMING

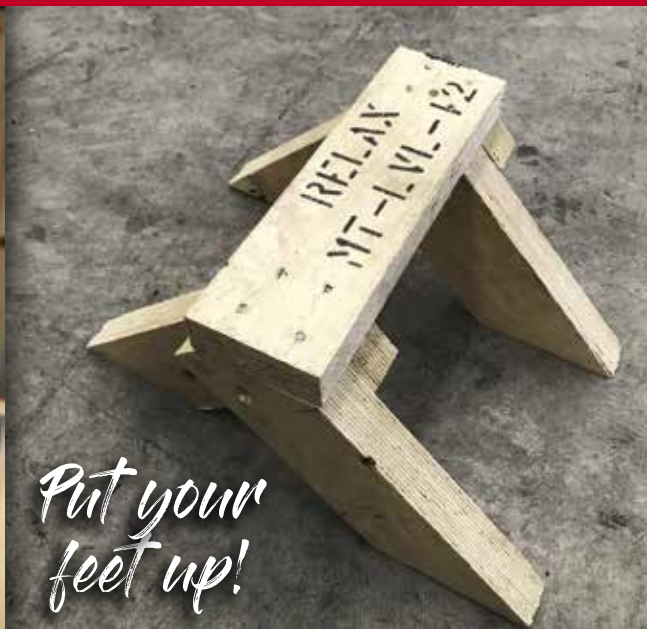

Put your feet up!

GRADE:	E12
SIZES:	90x35, 90x45
LENGTHS:	5.4m, 6.0m
TOLERANCE:	+/-1mm
TREATMENT:	H2-S to AS/NZS1604.4

- ◉ **STRAIGHTNESS OF LVL**
(less stud planing & crippling)
- ◉ **PREDICTABLE PERFORMANCE**
- ◉ **H2-S PROTECTED AGAINST TERMITES**

MT-LVL E12 is now available in cross sectional sizes of **90x35** and **90x45** for wall and general framing applications. With all the stability and dimensional benefits of LVL it means you can spend less time straightening walls... and more time relaxing.

MT-LVL E12 has higher strengths than MGP12 and a comparable stiffness. The reduced variability of being an engineered product means that it can confidently be used where MGP12 is specified. This also simplifies design and certification. The inclusion of a glueline protection against termites provides added security, even if the stud is notched or rebated.

Note that MT-LVL E12 has not been approved for use in roof trusses and floor trusses.



Meyer Timber NSW Pty Ltd. | **Meyer Timber Pty Ltd.**
Castlereagh Rd, Penrith, NSW 2750 | Dana Court, Dandenong, Vic, 3172
Phone (02) 4726 5900 | Phone (03) 9791 1897

www.meyertimber.com.au

AVAILABLE THROUGH:

