


# Meyer **TIMBER**<sup>®</sup>

## meySPAN15

THE CHORD YOU CAN TRUST

### Product Specifications

Depth (mm)	Thickness (mm)	Treatment	Coating	Modulus of Elasticity (MPa)
90	35	H2S	Genuine Moisture Barrier 	15000
120				
140				
190				
240				

### Design and Specification Information



meySPAN15 has been tested and is supported by the following AUS nailplate providers.  
Speak to your nailplate provider about products approved for use in roof trusses.

AUS Nailplate Providers	Software Preference Code	Joint Strength Group
Pryda	MTLVL15	JD4
Multinail	MTE15	
Mitek	MTDFT	

### Legal ~ Sustainable ~ Compliance

Veneer Species	Origin of Manufacture	Compliance
Douglas Fir FSC / PEFC Certified	Murphy Mill - Eugene Oregon, U.S.A.	APA Approved Manufacturer backed up by local certification

Meyer Timber<sup>®</sup> undertakes practices to ensure ongoing compliance to the Australian Illegal Logging Prohibition Act and the Modern Slavery Act.

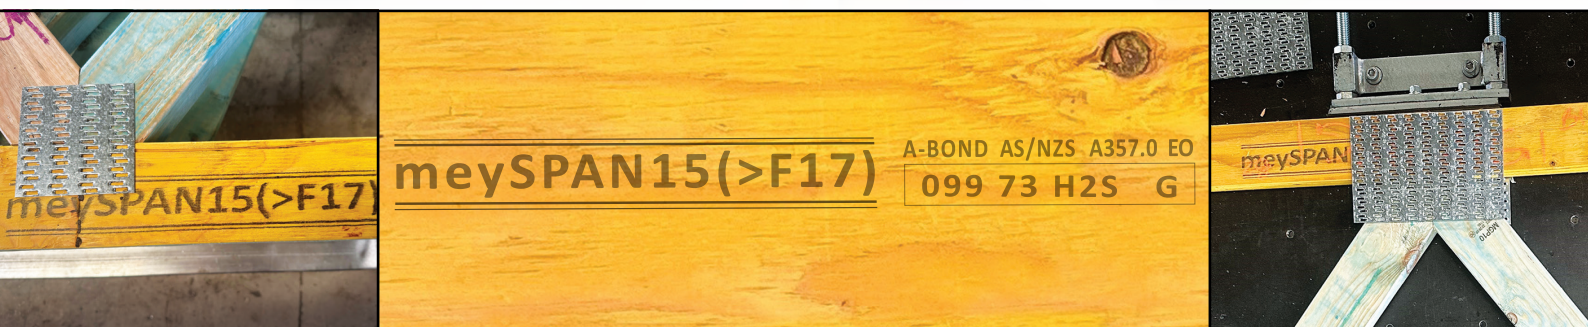

**Meyer Timber<sup>®</sup>**  
**Principal Engineer Support**

PROUD STRATEGIC PARTNER OF



[www.meyertimber.com.au](http://www.meyertimber.com.au)